



www.litprints.co.uk




Dear Customer

Thank you for your purchase and interest in our OO Gauge Bandstand.

We advise using Miter fast glue by Everbuild for its quick setting abilities, but normal super glue can be used. Please check for any defects and contact us if required to have these parts replaced.

ASSEMBLY INSTRUCTIONS.


1) Start by bending the railings by 45 degrees along each pole. You can use a ruler or table edge to help with the fold keeping the pole intact.

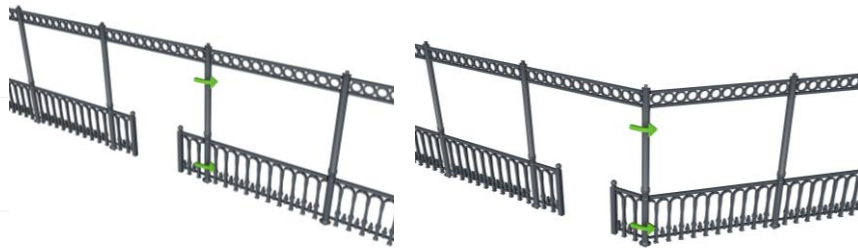

2) Keep bending by 45 degrees along each pole as seen below:



3: Once all poles have been folded by 45 degrees, glue the ends together in the areas pointed out below.

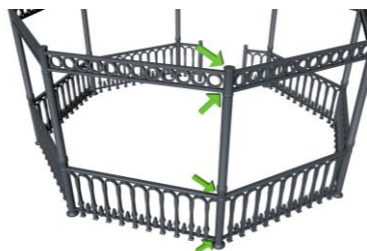

4. Fit the railings to the base as shown below. You have small pins to slot the railings into. When ready glue the pins and slot them in place, make sure to use the setting spray after the railings are in place. Use minial glue for cleaner results.



5. Add the roof of the bandstand , sometimes you need to use a pin to widen the slots in the roof. Repeat the same process as above ensuring to use the setting spray after the railings are in place. Use minial glue for cleaner results.



Contents

Railings

Roof

Base

